
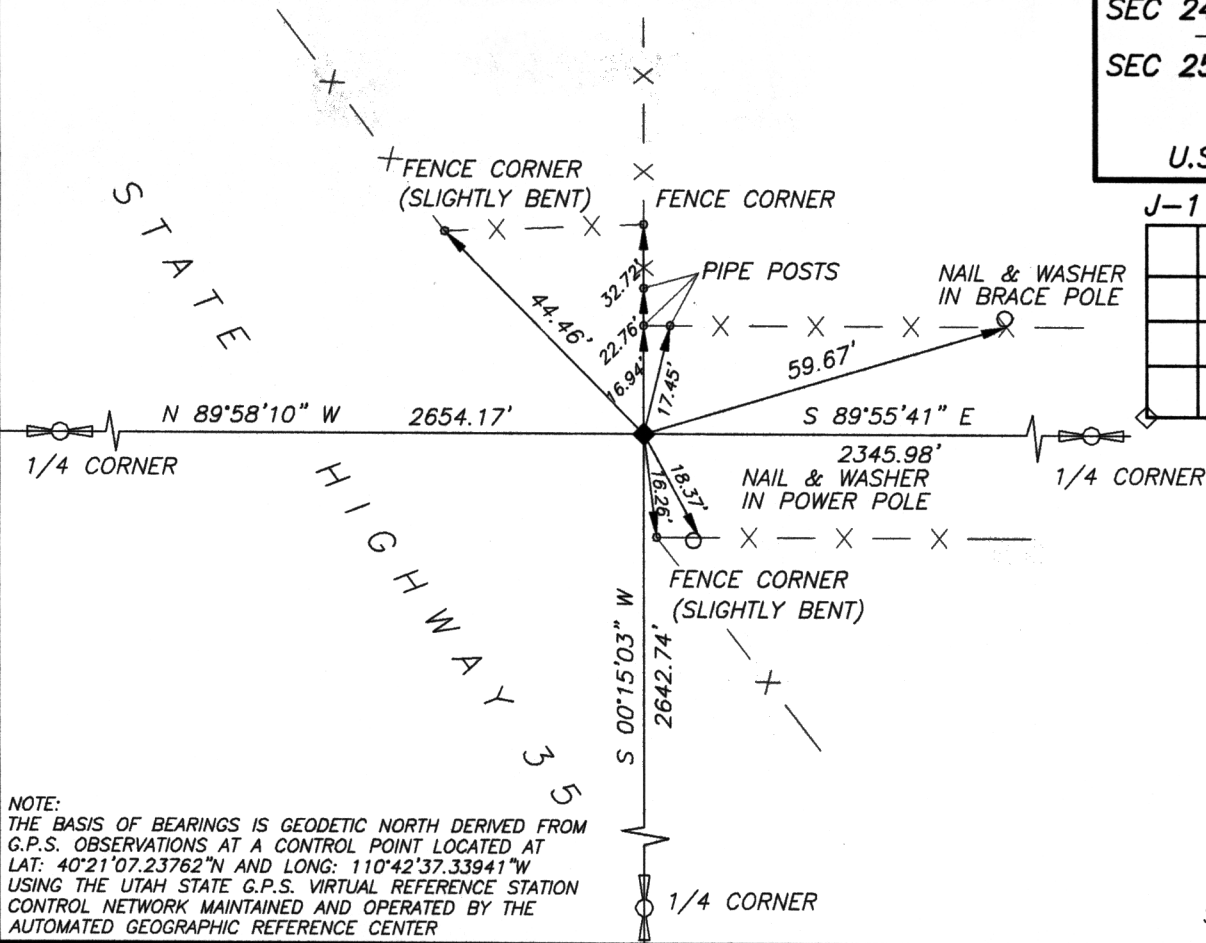


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S
 R8W R7W
 SEC 24 SEC 19
 SEC 25 SEC 30

U.S.B.&M.

J-1 & J-25



NOTE:
 THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM
 G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT
 LAT: 40°21'07.23762"N AND LONG: 110°42'37.33941"W
 USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION
 CONTROL NETWORK MAINTAINED AND OPERATED BY THE
 AUTOMATED GEOGRAPHIC REFERENCE CENTER



SCALE: 1"=30'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND IRON ROD BELOW ASPHALT ROAD SURFACE PREVIOUSLY

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
 THE ORIGINAL LOCATION OF THE CORNER

SET MONUMENT SPIKE (SPINDLE) FLUSH WITH ASPHALT ROAD SURFACE.

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
 (U.S. SURVEY FEET)
 NAD 83 UTAH CENTRAL ZONE
 7304944.212
 1855884.470

LATITUDE: 40°22'17.03772" N
 LONGITUDE: 110°43'35.97635" W
 PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0070W0_100300

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do
 hereby certify that I have performed or reviewed the work done on the
 diagrammed corner as reported on this recordation form and approve same

Date 27 Sep 2010

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor

